

## Castors, feet, stabilizers



RAX-MS-X81-X1

### ■ RAX-MS-X81-X1

Direct mounting castors set.

#### Max. recommended load capacity\*:

- 200 kg for type RMA, RZA, RIE, RPA, RPE, RCA, RSX (XS) 600 mm wide,
- 400 kg for type RMA, RZA, RIE, 800 mm wide,
- 450 kg for type RSX (XD), RSX-F.

The height of the cabinet is increased by 111 mm.

#### Set

Castors with a brake .....	2x
Castors without a brake .....	2x
Screw M5 x 20 Thorx .....	16x
Flat washer 5,3.....	16x



RAX-MS-X47-X1

### ■ RAX-MS-X47-X1

Direct mounting castors set.

#### Max. recommended load capacity\*:

- 500 kg for type RDA, RDE, RIE, RTA, RYA, 600 mm wide,
- 600 kg for type RDA, RDE, RIE, RTA, RYA, 800 mm wide,
- 900 kg for type RSX (XD), RSX-F.

The height of the cabinet is increased by 155 mm.

#### Set

Castors with a brake .....	2x
Castors without a brake .....	2x
Screw M5 x 20 Thorx .....	16x
Flat washer 5,3 .....	16x




RAX-MS-X64-X1




### ■ RAX-MS-X64-X1

Set of adjustable feet for free-standing cabinets with possibility of installation from the inner side of the cabinet. After rectification, it is necessary to ensure the position by the nut. The cabinet is raised in the range of 24-35 mm depending on the setting of the feet.

The maximum load capacity of the set is 1600 kg.

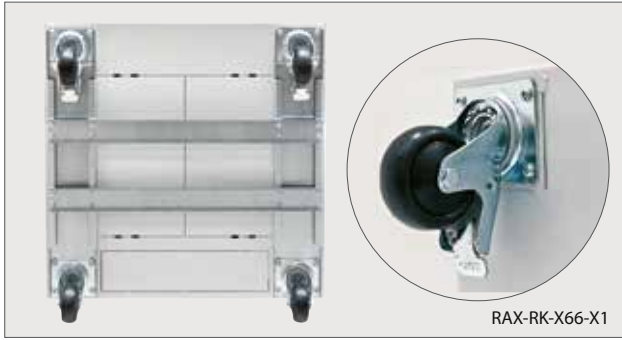

RAX-RK-X66-X1

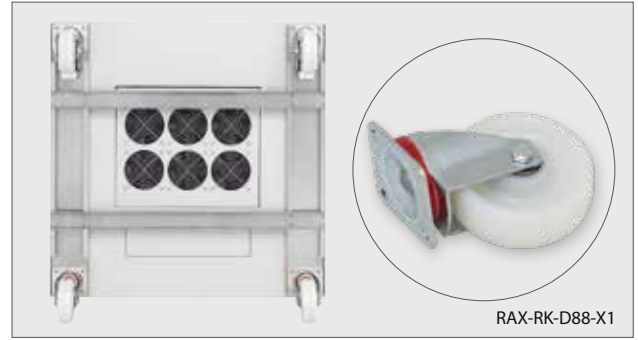

RAX-RK-D88-X1

Cabinet depth (mm)	Cabinet width (mm)	
	600	800
600	RAX-RK-X66-X1	RAX-RK-X86-X1
800	RAX-RK-X68-X1	RAX-RK-X88-X1
900	RAX-RK-X69-X1	RAX-RK-X89-X1
1000	RAX-RK-X61-X1	RAX-RK-X81-X1
1100	RAX-RK-X60-X1	RAX-RK-X80-X1
1200	RAX-RK-X62-X1	RAX-RK-X82-X1

Cabinet depth (mm)	Cabinet width (mm)	
	600	800
600	RAX-RK-D66-X1	RAX-RK-D86-X1
800	RAX-RK-D68-X1	RAX-RK-D88-X1
900	RAX-RK-D69-X1	RAX-RK-D89-X1
1000	RAX-RK-D61-X1	RAX-RK-D81-X1
1100	RAX-RK-D60-X1	RAX-RK-D80-X1
1200	RAX-RK-D62-X1	RAX-RK-D82-X1

**■ RAX-RK-Xxx-X1**

Castors with reinforcing frame.

Castors with reinforcing frame for RMA, RZA, RIE, RPA, RPE type enclosures. Must be ordered according to the floor plan of the cabinet.

**Max. recommended load capacity\*:**

- 450 kg for type RMA, RZA, RIE, RPA, RPE.

The height of the cabinet is increased by 111 mm.

**Set**

- Castors with a brake ..... 2x
- Castors without a brake ..... 2x
- Screw M5 x 12 Thorx ..... 16x
- Screw M5 x 20 Thorx ..... 16x
- Flat washer 5,3 ..... 16x
- U-profile ..... 4x

**■ RAX-RK-Dxx-X1**

Castors with reinforcing frame.

Castors with reinforcing frame for RMA, RZA, RTA, RYA, RDA, RDE, RIE, RPA, RPE type enclosures. Must be ordered according to the floor plan of the cabinet.

**Max. recommended load capacity\*:**

- 500 kg for type RPA, RPE,

- 900 kg for type RMA, RZA, RIE,

- 1050 kg for type RTA, RYA, RDA, RDE.

The height of the cabinet is increased by 158 mm.

**Set**

- Castors with a brake ..... 2x
- Castors without a brake ..... 2x
- Screw M5 x 12 Thorx ..... 16x
- Screw M5 x 20 Thorx ..... 16x
- Flat washer 5,3 ..... 16x
- U-profile ..... 4x



RAX-MS-X27-X1

RAX-MS-X28-X1

**■ RAX-MS-X27-X1**

Joining kit for free standing cabinets - with white sealing tape and 4x nuts with integrated fan washer + M5 screw.

**■ RAX-MS-X28-X1**

Joining kit for free standing cabinets - without sealing tape. 4x nuts with integrated fan washer + M5 screw.




RAX-MS-X27-Y1

**■ RAX-MS-X27-Y1**

Joining kit for free standing cabinets - with sealing tape and 4x nuts with integrated fan washer + M5 screw.



RAX-RK-T88-X1

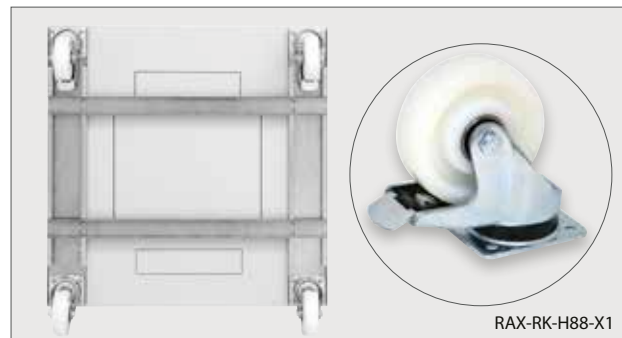

RAX-RK-H88-X1

Cabinet depth (mm)	Cabinet width (mm)	
	600	800
600	RAX-RK-T66-X1	RAX-RK-T86-X1
800	RAX-RK-T68-X1	RAX-RK-T88-X1
900	RAX-RK-T69-X1	RAX-RK-T89-X1
1000	RAX-RK-T61-X1	RAX-RK-T81-X1
1100	RAX-RK-T60-X1	RAX-RK-T80-X1
1200	RAX-RK-T62-X1	RAX-RK-T82-X1

Cabinet depth (mm)	Cabinet width (mm)	
	600	800
600	RAX-RK-H66-X1	RAX-RK-H86-X1
800	RAX-RK-H68-X1	RAX-RK-H88-X1
900	RAX-RK-H69-X1	RAX-RK-H89-X1
1000	RAX-RK-H61-X1	RAX-RK-H81-X1
1100	RAX-RK-H60-X1	RAX-RK-H80-X1
1200	RAX-RK-H62-X1	RAX-RK-H82-X1

### ■ RAX-RK-Txx-X1

Castors with reinforcing frame.

Castors with reinforcing frame for RTA, RYA, RDA, RDE type enclosures. Must be ordered according to the floor plan of the cabinet.

**Max. recommended load capacity\*:**

- 1500 kg for type RTA, RYA, RDA, RDE.

The height of the cabinet is increased by 143 mm.

**Set**

- Castors with a brake ..... 2x
- Castors without a brake ..... 2x
- Screw M5 x 12 Thorx ..... 16x
- Screw M5 x 20 Thorx ..... 16x
- Flat washer 5,3 ..... 16x
- U-profile ..... 4x

### ■ RAX-RK-Hxx-X1

Castors with reinforcing frame.

Castors with reinforcing frame for RTA, RYA, RDA, RDE type enclosures. Must be ordered according to the floor plan of the cabinet.

**Max. recommended load capacity:**

- 1600 kg for type RTA, RYA,

- 1900 kg for type RDA, RDE.

The height of the cabinet is increased by 168 mm.

**Set**

- Castors with a brake ..... 2x
- Castors without a brake ..... 2x
- Screw M5 x 12 Thorx ..... 16x
- Screw M5 x 20 Thorx ..... 16x
- Flat washer 5,3 ..... 16x
- U-profile ..... 4x

**STOP For the correct use of the optional Accessories the following instructions are important:**

- install the cabinet on a level and sufficiently firm floor
- place at least 65% of the load in the the lower half of the height of the cabinet
- ensure that the load is evenly distributed between the front and rear vertical rails
- when travelling with a loaded distributor, comply with the relevant standards\*\*

**Calculation of the load capacity of one wheel:**

\*Total weight of the cabinet (i.e. own weight + installed accessories) / 3 = load capacity of one castor.

\*\* The load capacities of the castors are applicable for travel speed up to 4 km/h on level ground and smooth surface at ambient temperature in the range of 10-30° C. All dimensions, load capacities and tolerances correspond to following standards: EN 12527-12533, DIN 7845.