

## Earthing



RAX-ZL-X15-X1

Type	Height (U)	Height (mm)
RAX-ZL-X15-X1	15	667
RAX-ZL-X18-X1	18	800
RAX-ZL-X22-X1	22	978
RAX-ZL-X27-X1	27	1200
RAX-ZL-X32-X1	32	1422
RAX-ZL-X37-X1	37	1645
RAX-ZL-X42-X1	42	1867
RAX-ZL-X45-X1	45	2000

### ■ RAX-ZL-Xxx-X1

Earthing rail vertical, solid copper 5 x 20 mm.

#### Supply

Screw M5 x 18 Thorx ..... 2x  
 Enlarged washer ..... 2x  
 Nut ..... 2x



RAX-SV-X01-X1

### ■ RAX-SV-X01-X1

Earthing clamp.



RAX-ZL-X02-A1

### ■ RAX-ZL-X02-A1

19" earthing rail horizontal, solid copper 5 x 20 mm.

#### Supply

Screw M6 x 12 Thorx ..... 2x  
 Plastic pad ..... 2x  
 Captive nut M6 ..... 2x



RAX-MS-X84-X1

### ■ RAX-MS-X84-X1

Earthing module on DIN rail designed for mounting on a 19" vertical, 36 earthing connections for max. crosscut 10 mm<sup>2</sup>, one connection for max. crosscut 25 mm<sup>2</sup>.


## Lighting unit



RAX-OJ-X07-X1

### ■ RAX-OJ-X07-X1

LED-diode lighting unit with magnet 1/2U with possibility of fixing on the vertical 19" rails, external power supply 230 V, 315 lm.

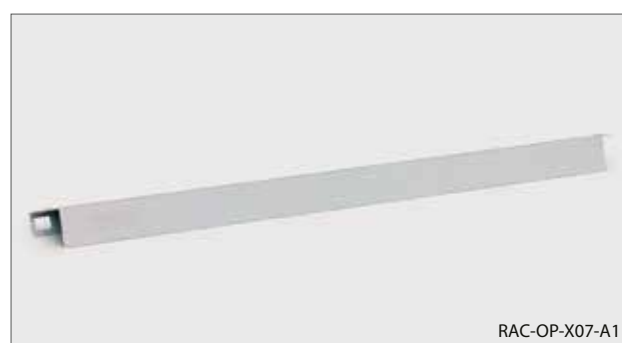

RAC-OP-X07-A1

### ■ RAB-OP-X07-A1, RAC-OP-X07-A1

19" cover/holder for LED-diode lighting unit RAX-OJ-X07-X1.